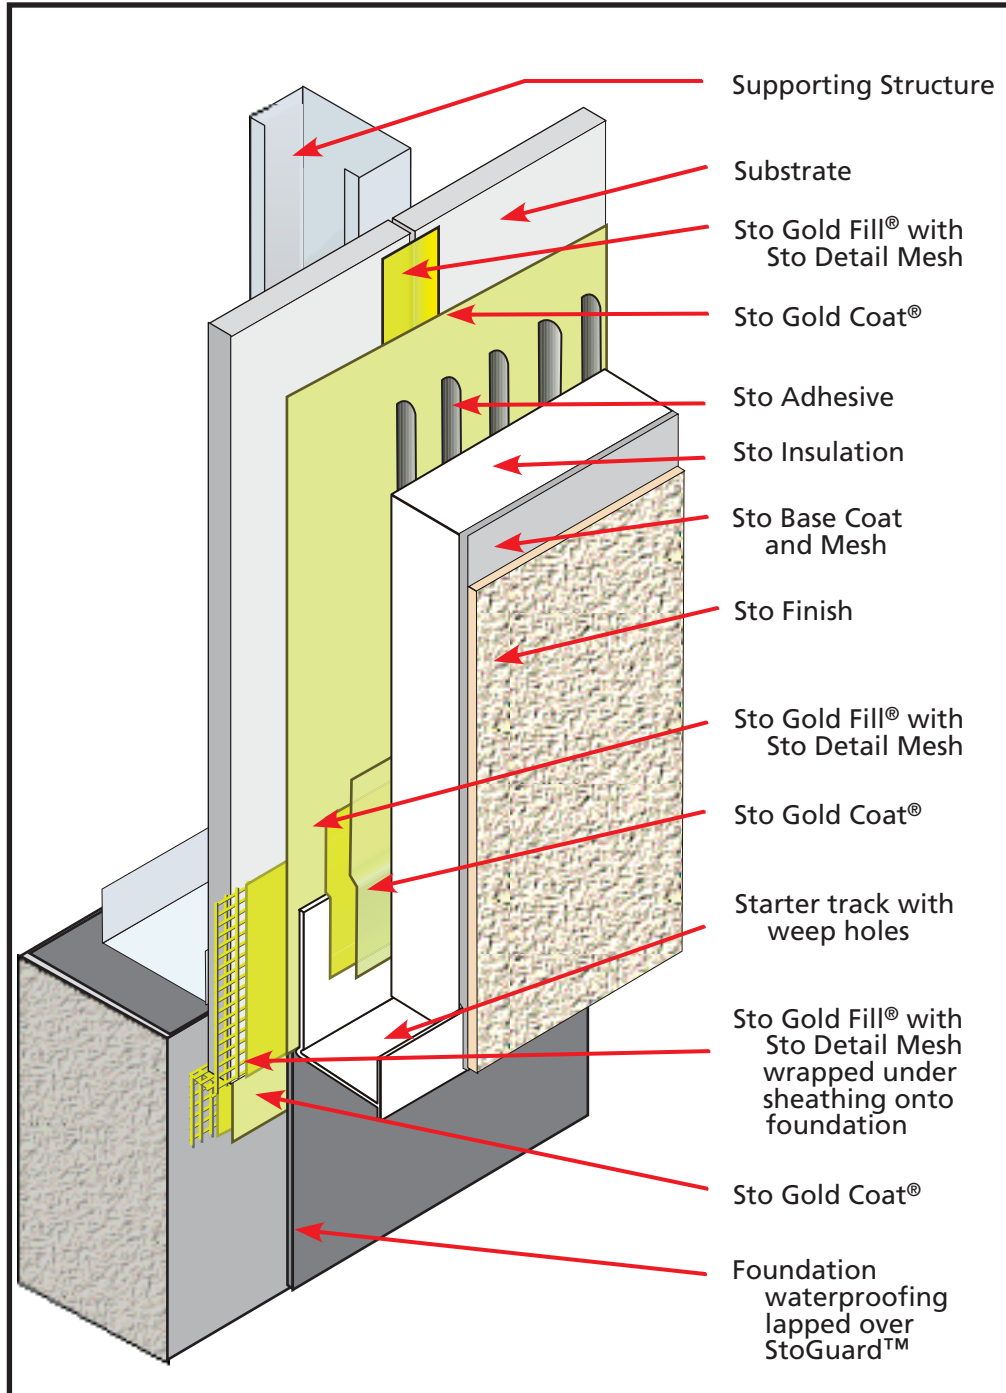


StoTherm™ NExT

Termination at Grade: Sheathing over Foundation

Date: September 2007

**Notes:**

1. Protect wall assembly from rising damp.
2. Terminate system a minimum of 8" (200 mm) above grade or as required by code.
3. Direct sprinklers away from the wall.
4. Protect the wall from dirt accumulation by covering exposed earth where back splash may occur.
5. Provide ultra-high impact resistance (Sto Detail 1.00b) to a minimum height of 6'-0" (1.8 m) above finished grade at areas accessible to pedestrian traffic and other areas exposed to abnormal stress or impact.

Sto Gold Coat and Sto Gold Fill are registered trademarks of Sto Corp.

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.