




StoTherm™ NExT Flanged Window Sill: Concealed Flashing

Detail No.: 10.29A

Date: September 2007

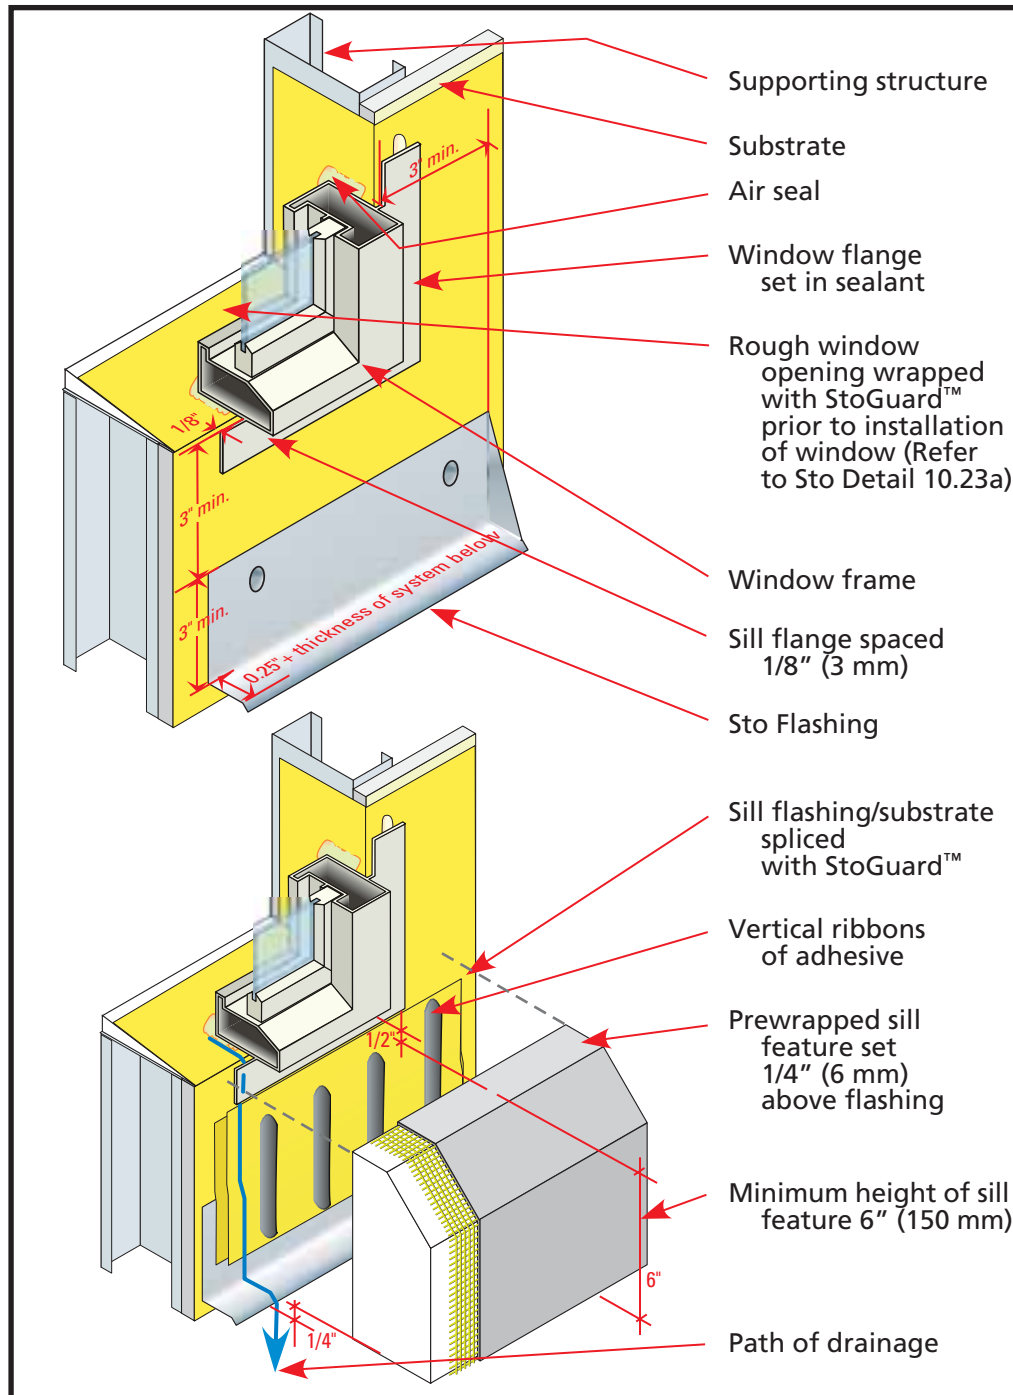

Notes:

1. Coordinate StoGuard installation sequence with window installer and other related trades.
2. Mark 3" (75 mm) from the window frame jambs and sill.
3. Install the flashing below the window to allow for minimum 4" (100 mm) splice of StoGuard centered over the flashing/substrate. Allow an additional 1/2" (13 mm) for the perimeter seal beneath the window sill and an additional 1/4" (6 mm) gap between the sill feature and flashing below.
4. The flashing should extend out from the wall a minimum of 1/4" (6 mm) beyond the StoTherm NExT cladding below.
5. Prewrap the sill feature with StoTherm NExT base coat and reinforcing mesh and install with vertical ribbons of adhesive. Provide a kerf in the back of the sill feature to accommodate flashing end dams.
6. Install balance of StoTherm NExT lapping base coat and mesh onto sill feature minimum 2.5" (65 mm).

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

www.stocorp.com