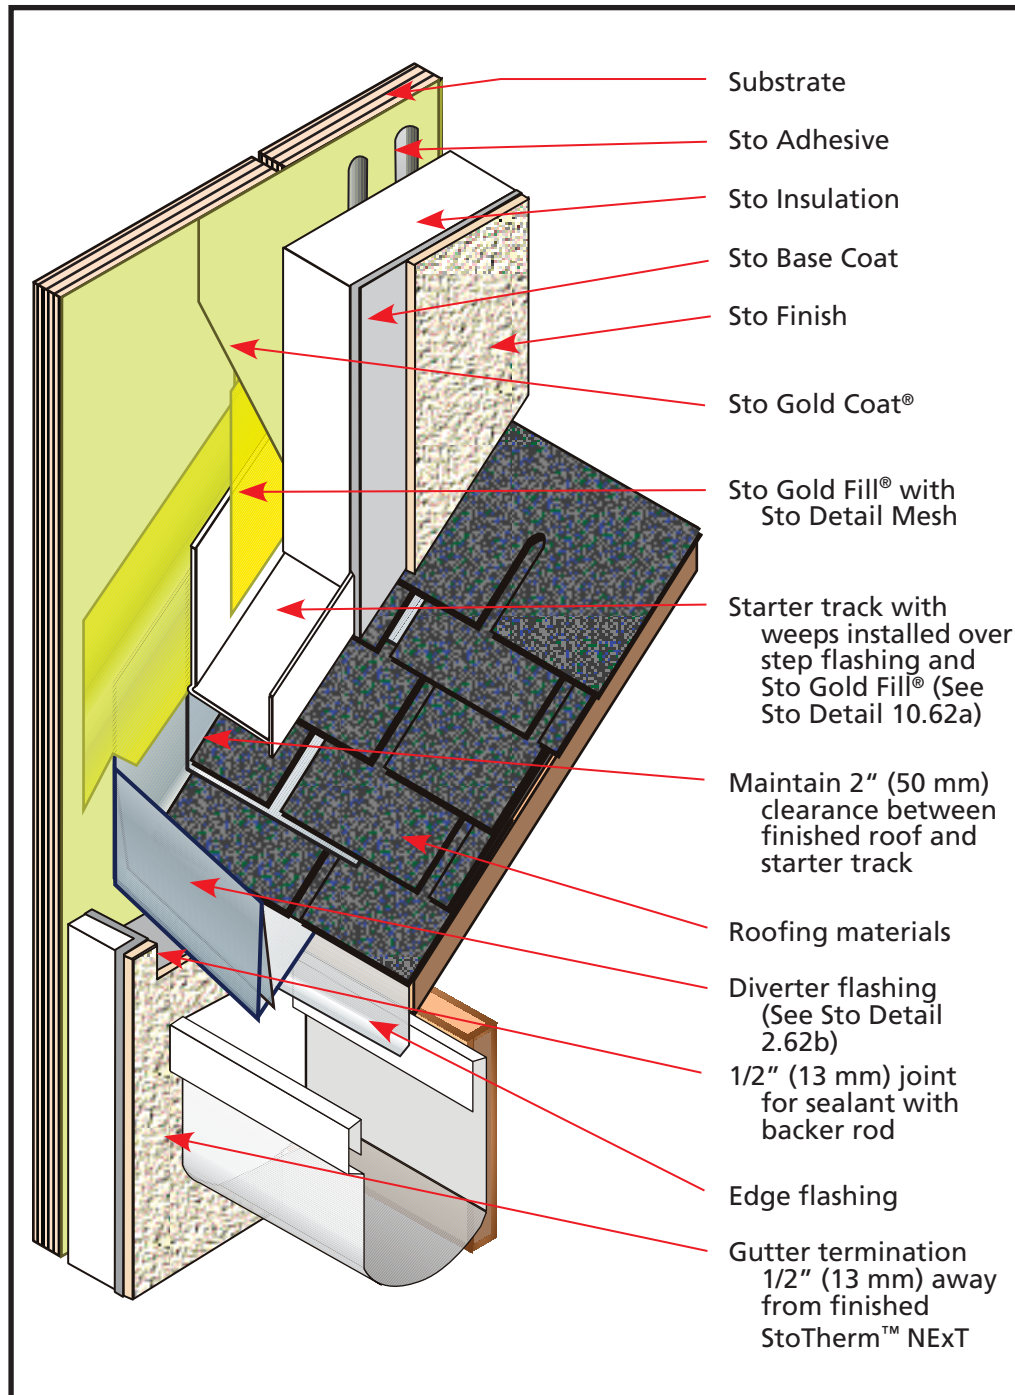


StoTherm™ NExT Roof/Wall Abutment

Date: September 2007

**Notes:**

1. Coordinate installation of StoGuard and StoTherm NExT with the roof installation. Typically, the step and diverter flashings are installed as part of the roof assembly.
2. Refer to Sto Detail 10.62A for integration of StoGuard system with the step and diverter flashings.
3. Install the starter track 2" (50 mm) above the finished roof and butting against the diverter flashing so water draining down the starter track will not flow over into the wall.
4. Install Sto Gold Fill with Sto Detail Mesh over the upper edge of the starter track and coat with Sto Gold Coat.

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

www.stocorp.com