


StoPatch Repair Mortar

CR211

Division 3

patching and repair mortar
foam, horizontal and pump
foam and pour
flowable/pumpable

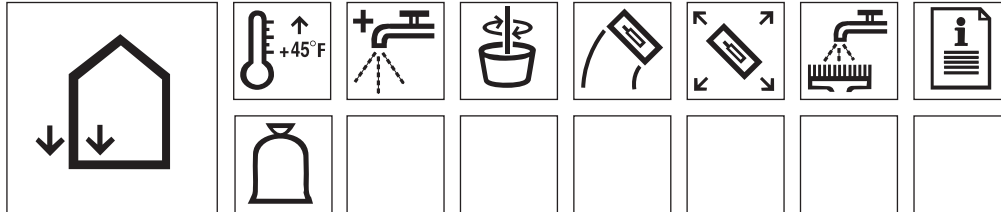

Technical Data

REPORT	TEST METHOD	TEST RESULTS	
Compressive Strength (psi)	ASTM C-109	1 day	2,200
		7 days	4,500
		28 days	5,500
Flexural Strength (psi)	ASTM C-293	7 days	900
		28 days	1,050
Modulus of Elasticity (psi)	ASTM C-469	28 days	< 3.5 x 10 ⁶
Splitting Tensile Strength (psi)	ASTM C-496	28 days	3.6 million psi
Length in Change	ASTM C-157	28 day	< 0.09

*Typical values for material cured at 73°F (23°C) and 50% R.H.
Note: To convert psi to megapascal (Mpa) multiply by 0.0069.

Features

Benefits

1 Low shrinkage	Stable bond line; resists perimeter cracking
2 Thermally compatible with concrete	Prevents delamination caused by temperature changes
3 High abrasion resistance	Stands up to abusive traffic
4 One component	Ready-to-use; pumpable; easily mixed with water on job-site; no chemical jugs to dispose

StoPatch Repair Mortar is a single-component cement-based mortar for structurally repairing or overlaying deteriorated concrete. Use on horizontal surfaces for repairs from 1/2 to 4 inches (12 to 102 mm) or extend it with aggregate for deeper applications.

Yield

0.40 ft³ per 50-lb bag
(0.0125 m³ per 23-kg bag).

Packaging

50-lb bag (23 kg)

Shelf Life

12 months in original, properly stored, unopened container.

Storage

Store in a dry area between 50°F (10°C) and 85°F (29°C). Protect from direct sunlight, extreme heat [90°F (32°C)] and freezing.

sto

CR211 StoPatch Repair Mortar

Surface Preparation

Patching

Remove loose and deteriorated concrete by mechanical chipping or sand-blasting to obtain a fractured aggregate surface. Detail the edge of the patch to a 90° angle to eliminate feather edging. Make sure surfaces are sound, clean and free of all bond-inhibiting material including oil, dust, dirt, laitance and standing water.

Overlay

Remove loose and deteriorated concrete with a scabblor or by shot-blasting to obtain a fractured aggregate surface. Detail the edge of the overlay to a 90° angle to eliminate feather edging. Make sure surfaces are sound, clean and free of all bond-inhibiting material including oil, dust, dirt, laitance and standing water.

Mixing

Use StoPatch Repair Mortar at a pre-conditioned temperature of 70 ± 5°F (21 ± 3°C).

Using Drill and Paddle: Mixing must be achieved mechanically using a slow-speed ¾ inch (9 mm) drill and mixing paddle. Pour 5-6 pints (2.37-2.83 L) of water into a clean 5 gallon (19 L) mixing bucket. Mix while slowly adding the powder, one-third at a time. If more water is needed, up to one-half pint (0.24 L) may be added. Mix up to 3 minutes, to a uniform, lump-free consistency. Avoid over mixing which could entrap air.

Mortar Mixer: Predampen thoroughly the inside of a clean mortar mixer, then remove any excess water. Pour 5.0-6.0 pints (2.37-2.83 L) of water per bag into the mortar mixer and slowly add all of the powder. If more water is needed, up to one-half pint (0.24 L) per bag may be added. Mix up to 4 minutes, to a uniform, lump-free consistency. Avoid over mixing which could entrap air. Once mixed the working time is 20-40 minutes depending upon material, ambient and surface conditions.

Application

Apply only to sound and clean, dry, properly pre-pared, frost-free surfaces.

Patching and Overlay

Dampen the area to be repaired so that the pores of the concrete are filled with water. Remove any ponding or glistening water on the surface (saturated surface dry/SSD).

Work a scrub coat of the mixed material into the substrate to ensure intimate contact and establish bond. Apply StoPatch Repair Mortar while the scrub coat is still wet. Consolidate it and trowel to desired finish.

NOTE: For application depths greater than 4 inches (102 mm), extend Sto Full-Depth Repair Mortar by adding 27 pounds (12 kg) of clean, uniformly graded ¾ inch (9 mm) aggregate dampened to SSD condition. Consolidate it and trowel to the desired finish.

Applications made during temperatures below 50°F (10°C) and above 80°F (27°C) should follow appropriate application guidelines.

Curing

Direct sun or wind may cause unwanted rapid surface drying. Curing may be accomplished by continuous water fogging for 48 hours or cover with damp burlap or burlene curing blankets. Do not use solvent-based curing compounds or allow water to puddle. If a coating or sealer will be applied, use water fogging or blanket curing methods and prep finished surface per manufacturer's recommendations.

Clean Up

Clean tools and equipment with water immediately after use. Cured materials can only be removed mechanically.

Limitations

- Apply only when the surface and ambient temperatures are 45-50°F (7-10°C) and rising. See Cold Weather Application guidelines, as per ACI for applications in temperatures less than 50°F (10°C). Applications made during temperatures greater than 85°F (29°C) should follow Hot Weather Application guidelines, as per ACI.
- Cold or damp conditions retard hydration and require additional time before coating or opening to traffic.
- The minimum required thickness is 1/2 inch (12 mm).
- Do not feather edge.
- Do not add more water than specified.
- Do not add additional powder from other units.
- Do not over mix.

Health And Safety

Health Precautions

Contains Portland cement and silica. Avoid breathing dust. As with any chemical construction product, exercise care when handling.

Safety Precautions

Use adequate ventilation. Use of NIOSH/MSA-approved dust respirator, safety goggles and protective gloves are recommended.

First Aid

SKIN CONTACT: Wash thoroughly with soap and water.

EYE CONTACT: Flush immediately with water for 10-15 minutes and contact a physician.

RESPIRATORY PROBLEMS: Remove affected person to fresh air immediately and contact a physician.

HYGIENE: Wash hands immediately after use. Wash clothing before reuse.

Spills

Collect in an appropriate container. Uncured material may be removed with water.

Disposal

Dispose of in accordance with local, state, or federal regulations.

Warning

KEEP CONTAINERS CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Material Safety Data Sheet for further health and safety information.

LIMITED WARRANTY

THIS PRODUCT IS SUBJECT TO A WRITTEN LIMITED WARRANTY WHICH CAN BE OBTAINED FREE OF CHARGE FROM: Sto Corp., 3800 Camp Creek Parkway, Building 1400, Suite 120, Atlanta, GA 30331; Tel: 404-346-3666; Fax: 404-346-3119

ATTENTION

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

Sto Corp.

3800 Camp Creek Parkway
Building 1400, Suite 120
Atlanta, GA 30331
Tel: 404-346-3666
Toll Free: 1-800-221-2397
Fax: 404-346-3119
www.stocorp.com



SCR155-211 03/07 VEN 5609

sto