


StoPowerwall™ Finish

80292 StoPowerwall™ Swirl X
 80296 StoPowerwall™ Fine
 80297 StoPowerwall™ Medium
 80298 StoPowerwall™ Swirl
 80299 StoPowerwall™ Freeform

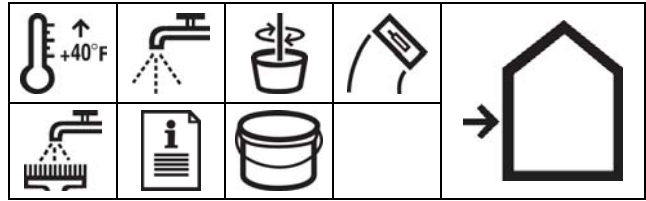

Technical Data

TEST	TEST METHOD	TEST CRITERIA	TEST RESULT
Flexibility	ASTM D-522	1/8" (3 mm) mandrel bend at 70 °F, 40 °F (21 °C, 4 °C)	Pass
Water Absorption	ASTM-D580	Measure percentage	9.30-9.93%
Adhesion (psi)	ASTM C-297 Modified	28 days	> 40 to unprimed stucco
Wash Off Resistance		No wash off at 24 hours [40°F (4°C)]	Pass
Drying Time at 40°F (4 °C)		Hours	6 Hours
Drying Time at 70 °F (21 °C)		Hours	4 Hours
Freeze/Thaw Resistance	EIMA 101.01	25 cycles	Pass - no deleterious effects
Water Vapor Permeability (U.S. Perms)	ASTM E96 Method B	Measure	17.5 > 15
VOC (g/L)	This product complies with US EPA (40 CFR 59) and South Coast AQMD (Rule 1113) VOC emission standards for architectural coatings. VOC less than 50 g/L.		

StoPowerwall™ Finish is a ready mixed, flexible textured wall coating used as a decorative and protective wall finish over prepared vertical, above grade concrete, masonry and plaster/ stucco substrates.

Coverage
 StoPowerwall Fine: 148-158 ft² (13.8-14.1 m²) per pail.
 StoPowerwall Medium: 111-120 ft² (10.3-11.2 m²) per pail.
 StoPowerwall Swirl: 120-130 ft² (11.2-12.1 m²) per pail.
 StoPowerwall Swirl X: 90-100 ft² (8.3-9.3 m²) per pail.
 StoPowerwall Freeform: 90-130 ft² (8.3-12.1 m²) per pail.

Coverages may vary depending on application technique and surface conditions.

Packaging
 5 gallon pail (19 L).

Shelf Life
 12 months, if properly stored and sealed.

Storage
 Protect from extreme heat [90°F (32°C)], freezing, and direct sunlight.

Features Benefits

1 Flexible	Bridges hairline cracks
2 Acrylic-based	Excellent adhesion; weather-resistant
3 Ready-mixed	Ready to use; no additives needed
4 Water-based	Safe, non-toxic; cleans up with water
5 Low VOC	Safe for workers and the environment

StoPowerwall™ Finish

Surface Preparation

Concrete and masonry surfaces: Surfaces must be free of all bond-inhibiting materials, including dirt, efflorescence, form oil and other foreign matter. Loose or damaged material must be removed by water blasting, sandblasting or mechanical wire brushing

and repaired. Avoid application over irregular surfaces. Resurface, patch or level surfaces to required tolerance and smoothness with appropriate Sto leveling materials. Refer to ASTM D-4258 and ASTM D-4261 for complete details on methods of preparing cementitious substrates for coatings.

Mixing

Mix with a clean, rust-free electric drill and paddle. A small amount of clean water may

be added to aid workability. Limit addition of water to amount needed to achieve the finish texture.

Application

Apply only to sound, clean, dry, properly prepared, frost-free surfaces.

Trowel: Apply StoPowerwall Finish with a clean stainless steel trowel to a rough thickness slightly more than the largest aggregate size. Use the trowel to scrape the material down to a uniform thickness no greater than the largest aggregate size. Achieve final texture by floating in a figure eight motion with a plastic float. For StoPowerwall Freeform application thickness varies depending on the pattern or texture desired. Apply to a minimum 1/16 inch (1.6 mm), maximum 3/16 inch (4.8 mm) thickness. Texturing may be achieved by trowel, special roller, or putty knife. Apply uniformly to avoid color discrepancies. Once applied, the working time is up to 15 minutes depending upon material, ambient temperatures and surface conditions.

Spray: Apply the StoPowerwall Finish with a hand-held gravity-feed hopper type sprayer, texture spray pump machine, or other appropriate equipment such as the StoSilo system or Sto's M-8 spray pump. Apply an even coat to ensure full coverage of the surface. (Spray application is not recommended for StoPowerwall Swirl).

IMPORTANT:ALWAYS check color for proper match. If color does not match, STOP-call your Sto representative. For best results always prime cementitious substrates. Apply coating in a continuous application, always working from a wet edge or architectural break to eliminate cold joints. Minor shade variations may occur from batch to batch (refer to batch no. on pail). Avoid installing separate batches side-by-side and avoid application in direct sunlight. Avoid installing new finish adjacent to weathered or aged finish. Sto Corp. will not be responsible for shade or color variation from batch to batch, variation caused by application or substrate deficiencies, or fading resulting from natural causes such as weather. See Tech Hotline Nos. 0694-C, 0893-EC and 1202-CF for helpful tips on prevention of color problems. Protect installed product from rain, freezing, and continuous high humidity until completely dry.

Curing/Drying

StoPowerwall Finish dries within 24 hours under normal conditions [70°F (21°C), 50% RH]. Drying time varies with temperature/ humidity and surface conditions.

Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Health And Safety

Health Precautions

Product is water-based. As with any chemical construction product, exercise care when handling.

Safety Precautions

Use adequate ventilation. Safety goggles and protective gloves are recommended. Remove contaminated clothing immediately.

First Aid

SKIN CONTACT: Wash thoroughly with soap and water.
EYE CONTACT: Flush immediately with water for 10-15 minutes and contact a physician.
RESPIRATORY PROBLEMS: Remove affected person to fresh air immediately and contact a physician.
HYGIENE: Wash hands immediately after use. Wash clothing before reuse.

Spills

Collect with suitable absorbent material such as cotton rags.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Material Safety Data Sheet on www.stocorp.com for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty which can be obtained free of charge from Sto Corp.

Refer to Sto Specifications for more complete information on proper use and handling of this product.

Limitations

- Use StoPowerwall Finish only when surface and ambient temperatures are above 40°F (4°C) during application and drying period.
- StoPowerwall Finish should not be used on horizontal, below grade or water immersed surfaces.
- StoPowerwall Finish is not recommended over interior wall surfaces.

Sto Corp.
 3800 Camp Creek Parkway
 Building 1400, Suite 120
 Atlanta, GA 30331

Tel: 404-346-3666
 Toll Free: 1-800-221-2397
 Fax: 404 346-3119

www.stocorp.com

S155-80292-80299

Revision Number: 01
 Date: 10/2009



Attention

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.