


# StoSet 9000 Waste Solidifier

CR6090

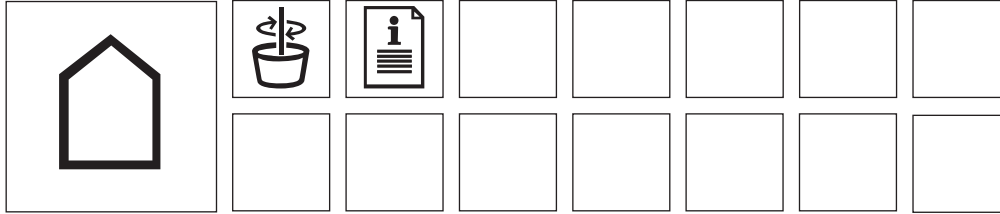

Features	Benefits
----------	----------

<b>1</b> Easy to use	Works in minutes
<b>2</b> Non-toxic	Environmentally sound

## Mixing

One 30 lb. pail will harden up to 107 gallons. One quart (1.3 lbs) will harden most Sto Corp. finishes and coatings. Add the crystals to the waste or spilled liquid (Note: one cup of water may be added to thick liquid

for ease of use). Stir liquid until thick. Scrape spills into a pile. Dispose as regular garbage in accordance with local regulations.

## How It's Used

- Disposal of acrylic and latex based textured finishes, paints, and coatings.
- Disposal of any water-based product that otherwise is safe for disposal in a landfill, but for the fact that it is liquid.
- Spills of the above materials.

## Health and Safety

### Health Precautions

Avoid contact with skin and eyes. Wash hands thoroughly after handling. Do not ingest. Avoid handling product dust. Keep out of reach of children. Avoid inhaling.

### Safety Precautions

Use adequate ventilation. Use of a NIOSH/MSA-approved dust respirator, safety goggles and protective gloves are recommended.

### First Aid

**INHALATION:** Remove to fresh air. If necessary, restore breathing. Seek medical attention.

**EYE CONTACT:** Hold eyelids open and flush eyes for at least 15 minutes with large quantities of water. Seek medical attention.

**SKIN CONTACT:** Wash affected areas with soap and water.

Remove and launder contaminated clothing before reuse. If irritation develops seek medical attention.

**INGESTION:** If swallowed, dilute with water and immediately induce vomiting. Never give fluids or induce vomiting if the victim is unconscious or having convulsions. Seek immediate medical attention.

### Disposal

Dispose of hardened liquid in accordance with applicable environmental and government regulations.

### Warning

If you scrape, sand, or remove old paint, you may release lead dust or fumes. LEAD IS TOXIC. EXPOSURE TO LEAD DUST OR FUMES CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a properly fitted NIOSH-approved respirator and prevent skin

contact to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the USEPA National Lead Information Hotline at 1-800-424-LEAD or log on to [www.epa.gov/lead](http://www.epa.gov/lead). In Canada contact a regional Health Canada office. Follow these instructions to control exposure to other hazardous substances that may be released during surface preparation.

### ATTENTION

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, [www.stocorp.com](http://www.stocorp.com).

*StoSet 9000 Waste Solidifier offers an environmentally safe way to dispose of acrylic and latex based textured finishes, paints, and coatings, such as those used in the EIFS and stucco industries. Most landfills do not accept these types of products in a liquid form so save yourself some time and money by simply adding StoSet 9000 to liquid products to safely dispose of waste material. It is great for quickly containing job site paint spills.*

### Packaging

30 lb. (13.6 kg)/5 US gal pail (18.9 L).

### Product Data

Appearance: White granular  
Density: 25-31 lbs/cubic foot (400-497 kg/m<sup>3</sup>).

### Shelf Life

12 months, in original unopened container.

### Storage

Store in a dry area between 50°F (10°C) and 85°F (29°C). Protect from direct sunlight.

### Sto Corp.

3800 Camp Creek Parkway  
Building 1400, Suite 120  
Atlanta, GA 30331  
Tel: 404-346-3666  
Toll Free: 1-800-221-2397  
Fax: 404-346-3119  
[www.stocorp.com](http://www.stocorp.com)

SCR155-6090 08/07 VEN 5609

**sto**<sup>®</sup>