

Sto Texture Coat



Sto Texture Coat can save up to 75% in materials cost over traditional coverings such as stone, brick or tiles.




For the elegance of stone, the warmth of brick, and the durability of concrete



The Sto Texture Coat System is a decorative floor or wall finish system for use over prepared interior or exterior concrete and concrete masonry surfaces. It is intended for use on balconies, walkways, decks, and other horizontal surfaces exposed to light pedestrian traffic, as well as vertical wall surfaces. Sto Texture Coat can also be applied over Sto Watertight Coat to achieve a waterproof deck finish system. The system provides unlimited textured effects to choose from. The use of a colored finish will provide a warrantable color.

Contact your local distributor for more information. Please visit us at www.stocorp.com or call us toll-free at 888-552-4111.

Sto Texture Coat Stencils

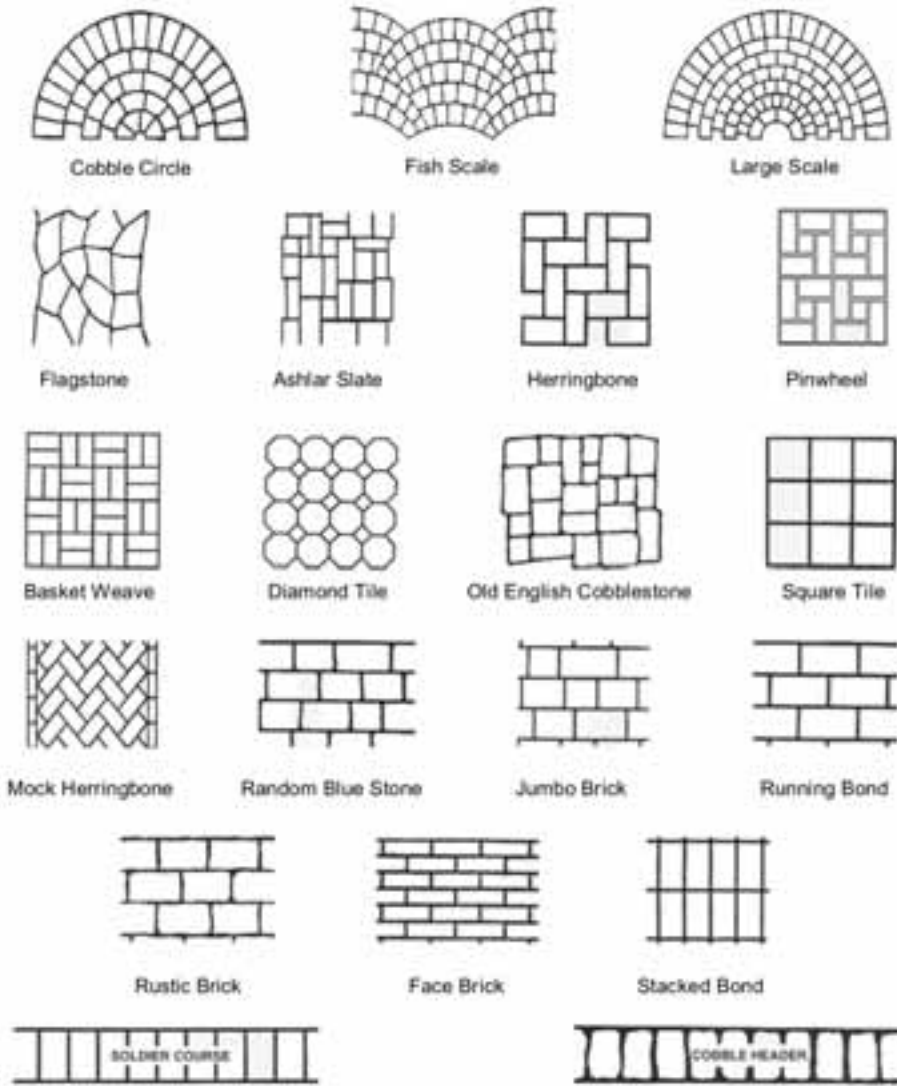

Note: Color, coverage, and texture will vary with different substrates and applicator techniques.

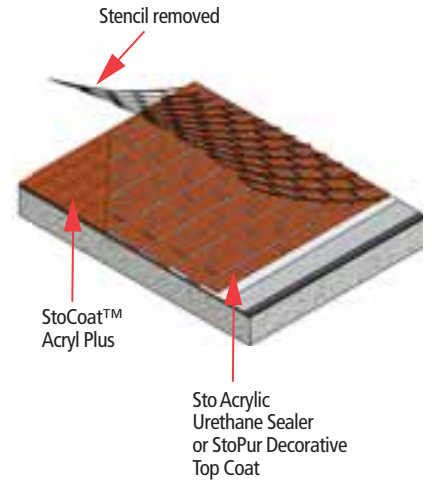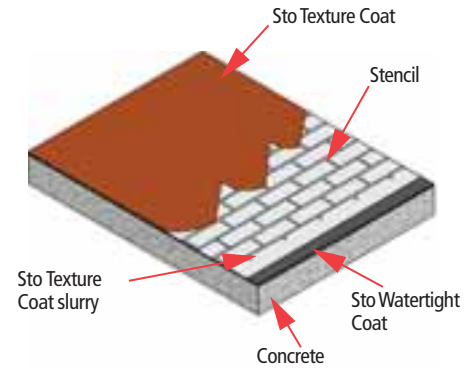

Why Sto Texture Coat?

FEATURE	BENEFIT
1. Acrylic polymer-modified	Excellent adhesion, blended to eliminate mixing errors in the field
2. Non-vapor barrier	Allows substrate to breathe
3. Integrally colored dry component	Provides increased color integrity with minimized variations
4. Spray-applied with Sto M-8 pump or hopper gun	Increases job site productivity and allows for a wide variety of design options
5. Multiple color and texture choices	Allows for a wide variety of creative design options

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

Sto Corp.

3800 Camp Creek Parkway
Building 1400, Suite 120
Atlanta, GA 30331

Tel: 404-346-3666
Toll Free: 1-800-221-2397

Fax: 404-346-3119

www.stocorp.com

