


StoTique®

80203 StoTique

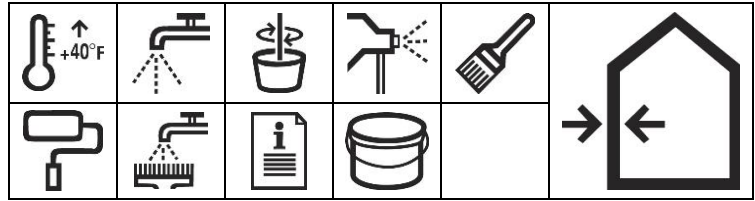

Technical Data

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS
VOC (g/L)		This product complies with US EPA (40 CFR 59) and South Coast AQMD (Rule 1113) VOC emission standards for architectural coatings. VOC less than 50 g/L.	

StoTique is an exterior and interior coating that can be applied over any Sto finish to achieve an antiqued or mottled appearance.

Mixing

Add clean potable water to the level equal to the second rib from the top of the pail, which will give you the required mix ratio of 1 part of StoTique to 1.3 parts of water (by volume). See diagram below.

Thoroughly mix StoTique with a clean, rust free drill and paddle. Frequent agitation is required throughout application to ensure color consistency.

Coverage

800-1000 ft² per pail.

Coverages may vary depending on application technique and surface conditions.



IMPORTANT: ADD WATER JUST PRIOR TO APPLICATION OF STOTIQUE TO PREVENT SETTLING OF SOLIDS. ONCE DILUTED THE PRODUCT SHOULD BE APPLIED THE SAME DAY.

Packaging

5 gal. pail (19 L).

Shelf Life

12 months, if properly stored and sealed.

Storage

Protect from extreme heat [90°F (32°C)], freezing, and direct sunlight.

StoTique

Application

Apply StoTique only to a sound and clean, dry, properly prepared frost-free surface. StoTique may be applied with a roller, brush, sponge, Hudson-type sprayer, airless spray equipment, and/or any combination of these tools depending on the desired end appearance.

Once material is applied it may be dabbed with a sponge or rag to create custom look. It is best to apply StoTique in two light coats. Be sure to watch for running, brush or roller marks, as they should be corrected right away.

IMPORTANT: ALWAYS check color for proper match. If color does not match, STOP – call your Sto distributor. Apply coating in a continuous application, always working from a wet edge or architectural break to eliminate cold joints. Minor shade variations may occur from batch to batch (refer to batch number on the pail). Avoid installing separate batches side-by-side and avoid application in direct sunlight. Avoid installing new coating adjacent to aged coating. Sto Corp. will not be responsible for shade or color variation from batch to batch variation caused by application or substrate deficiencies, or fading resulting from natural causes such as weather. Protect installed product from rain, freezing, and continuous high humidity until completely dry. The nature of this finish is to produce a worn, non-uniform, old world appearance.

Limitations

- Use only when surface and ambient temperatures are above 40°F (4°C) during application and drying period.
- Dark colored coatings are not recommended for use over Exterior Insulation and Finish Systems (EIFS).
- Select finish colors with a lightness value of 20 or greater when used as part of an EIF System.
- StoTique should not be used on horizontal, below grade or water immersed surfaces.

Final appearance is highly dependent on application technique and desired effect. Proceed only when satisfied with final color/effect on the basis of approved mock-ups.

Drying

Dries within 24 hours under normal [70°F (2°C), 50% RH] conditions. Drying time varies with temperature/humidity and surface conditions.

Clean Up

Clean up tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Health And Safety

WARNING!

Causes eye and skin irritation.

Precautionary Statement

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

FIRST AID MEASURES

Eye Contact: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eyelids with fingers. Get immediate medical attention.
Skin Contact: Immediately wash skin with plenty of soap and water for 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention.
Ingestion: If swallowed, do NOT induce vomiting. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person.

Store locked up. Dispose of contents/container in accordance with Local, State, Federal and Provincial regulation.

Spills: Collect with suitable absorbent material such as cotton rags.

Disposal: Dispose of in accordance with local, state or federal regulations.

Warning: KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) on www.stocorp.com for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty which can be obtained free of charge from Sto Corp.

Refer to Sto Specifications for more complete information on proper use and handling of this product.

Sto Corp.
3800 Camp Creek Parkway
Building 1400, Suite 120
Atlanta, GA 30331

Tel: 404-346-3666
Toll Free: 1-800-221-2397
Fax: 404 346-3119

www.stocorp.com

S155-80203
Revision Number: A3.1
Date: 04/2018

Attention

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.