



Building with conscience.

Sto TurboStick®

A revolutionary foam adhesive that delivers unmatched convenience and efficiency.

Facades



Sto TurboStick® is a ready-to-use, single component polyurethane foam adhesive for installing Sto insulation boards in StoTherm® ci exterior wall claddings. Compared to cementitious adhesives, Sto TurboStick delivers unparalleled convenience and installation speeds.





A More Efficient Adhesive

Unlike traditional cementitious adhesives that require mixing and extended drying time, Sto TurboStick is an entirely new polyurethane-foam adhesive system that requires no mixing, goes on easier and cures in just one hour. It can even be used for other applications, such as filling voids between insulation boards.

Sto TurboStick Saves Time and Money

Traditional cementitious systems are bulky and heavy, making it difficult to get up scaffolding. Sto TurboStick is lightweight and easy to maneuver. No mixing, easier staging and a cure time of just one hour, that's how Sto TurboStick is going to save you both time and money.

Features and Benefits

Ready to Use: No mixing required: ensures consistent quality, meets manufacturer specifications.

Cures in One Hour: Shortens construction schedule: rasp, cut joints and apply base coat and mesh the same day.

Small Packaging: User friendly: lighter and easier to handle on the jobsite.


Lightweight: Convenient: one 31 lb cylinder equals 10 bags of cementitious adhesive (500 lb) and one 16oz canister equals one bag of cementitious adhesive (50 lb).

Fast Application: Saves labor time - reducing costs.

Available in Two Convenient Sizes

Sto TurboStick is available in two convenient sizes so you can choose the size that best fits your project. The Sto TurboStick cylinder provides greater coverage as it holds the equivalent of 10 50-pound bags of cementitious adhesive.

The TurboStick Mini is compact and easy to use. Its lightweight, maneuverable size makes it perfect for projects that have limited access or hard to reach areas.

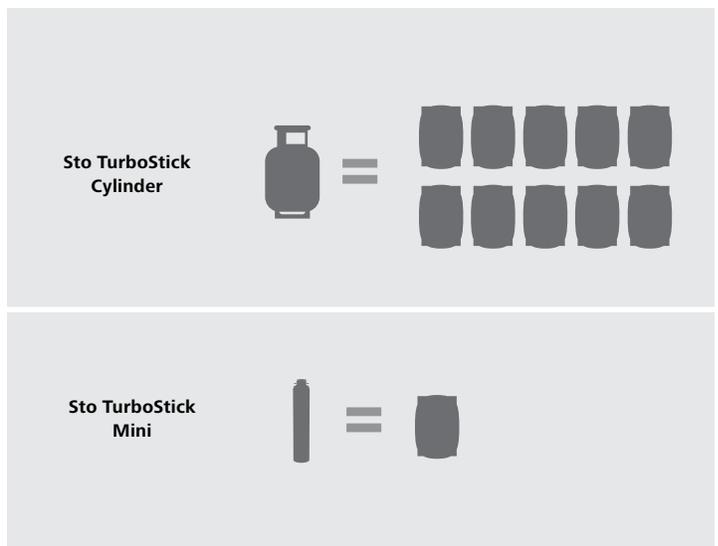

	Sto TurboStick Cylinder	Sto TurboStick Mini
Packaging	31 lbs (14.1 kg) cylinder	25.4 oz (750 ml) canister
Coverage (Per Unit)	850-1,000 ft ² (79-93 m ²)	110-130 ft ² (10-12m ²)
Cure Time	Full curing occurs in 1 hour under normal conditions [70° F (21° C), 50% RH]	
Application Temperature	33° F (1° C) - 110° F (43° C)	41° F (5° C) - 95° F (35° C)
Accessories	Pistol & hose (sold separately)	Pistol (sold separately)

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

Sto Americas

Sto Corp.
3800 Camp Creek Pkwy
Building 1400, Suite 120
Atlanta, GA 30331
USA

Phone 1-800-221-2397
www.stocorp.com