



Sto GraniTex®

Textured wall surface finish

Facades




Interiors



Sto GraniTex® is a lightweight, durable wall finish with the stylish look and feel of natural stone providing long-term performance and low maintenance with a variety of natural textures to create a classically elegant facade.

Sto GraniTex® is an acrylic-based interior and exterior wall finish, that can be used in new construction or renovation. It is spray-applied and designed to provide the texture and appearance of natural stone, but in a versatile lightweight finish coating that may be used in several Sto engineered wall systems.

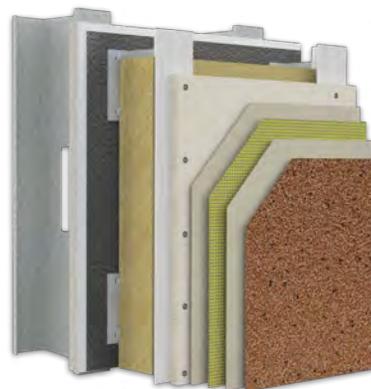

**StoVentec® Render
with Santa Rosa finish**



**StoTherm® ci Mineral
with Sandy Bottom finish**



30165 Sandy Bottom

■ 37



30164 Hallmark Gray

■ 35



30157 Apricot Chalk

■ 43



30166 Melon Gray

■ 37



30170 Sumocha

■ 23



30159 Diorite

■ 38




30152 Shallow Water

■ 25



30171 Santa Rosa

■ 17

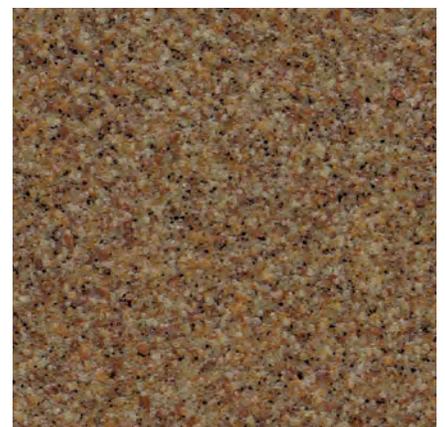

30172 Copperhead

■ 17



30155 White Slate

■ 39



30167 Fresh Flint

■ 40



30156 Light Pepper

■ 40



30150 Overcast

■ 28



30163 Rich Pewter

■ 32



30160 Chimney Hill

■ 30



30173 Cold Spring

■ 14



30154 Syenite

■ 19



30161 Dusk Gray

■ 25



Substance and Style

Sto GraniTex delivers incredible design flexibility that conventional finishes simply cannot rival. With a variety of natural textures and 18 available color options, Sto GraniTex offers designers countless options to achieve the look of stone at a fraction of the cost. Plus, it is as durable as it is attractive, UV resistant and engineered for long term performance and low maintenance. The sturdy and versatile finish is ideal for new construction or restoration projects where continuation of stone is needed. Sto GraniTex is compatible with Sto Panel Technology®, StoPowerwall®, StoQuik® Silver, StoTherm® ci and StoVentec® Render.

Features	Benefits
Variiegated aggregates	Cut stone and granite look with less weight
Vapor permeable	Allows substrate to breathe naturally; resists blisters caused by trapped vapor
Ready-mixed	Ready to use; no additive needed; easy application
Pure acrylic	Excellent adhesion
Water-based	Safe, non-toxic; cleans up with water



ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

Sto Americas

Sto Corp.
3800 Camp Creek Pkwy
Building 1400, Suite 120
Atlanta, GA 30331
USA
Phone 1-800-221-2397
www.stocorp.com