


PRODUCT BULLETIN

StoGuard® Fabric StoGuard® RediCorner®

Product Number(s):

80207 StoGuard Fabric 6-in 81361 StoGuard Fabric 9-in

80208 StoGuard Fabric 4-in 80209 StoGuard RediCorner

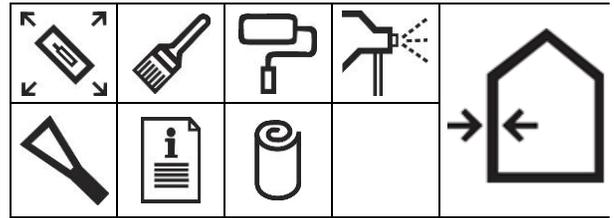

PRODUCT DESCRIPTION

StoGuard Fabric is a non-woven cloth reinforcement for use with StoGuard coatings as part of a complete StoGuard Air and Water-resistive Barrier System. It is used to seal sheathing joints and seams, to protect rough openings, and to detail other transitions in vertical above grade wall construction.

StoGuard RediCorner is a preformed fabric piece used in the corners of rough openings for quick and easy installation.

FEATURES	BENEFITS
Easy to cut and handle	No special skills needed for installation
Flexible	Folds easily around corners
Installs with brush or roller	Does not require highly skilled labor
Preformed RediCorners	Installs fast and helps to ensure protection at corners of openings

Packaging:

StoGuard Fabric 4-in x 180 ft (102mm x 50m): 18 rolls per box

StoGuard Fabric 6-in x 180 ft (152mm x 50m): 12 rolls per box

StoGuard Fabric 9-in x 180 ft (229mm x 50m): 12 rolls per box

StoGuard RediCorner: 60 pieces per box

Color: Gray

Shelf Life: 18 months when properly stored in original unopened packaging.

Storage: Store off the ground in a dry area. Protect from direct sunlight.

SURFACE PREPARATION

Sto Proprietary Wall Systems: StoTherm® ci, StoVentec®, StoPowerwall®, StoQuik® Silver, StoPanel®, and StoLite® systems. Refer to applicable Sto Specification.

Surfaces must be fully cured, structurally sound, clean, dry, and free of frost, damage, and all bond-inhibiting materials, including dirt, dust, efflorescence, form oil and other foreign matter. Sheathing must be Exterior Grade or Exposure 1 wood-

based sheathing, ASTM C1177 compliant glass mat gypsum sheathing, or ASTM C1325 Type A cementitious sheathing. Sheathing must be installed in compliance with the building code and manufacturer's recommendations. Treat sheathing joints, inside and outside corners, and transition details with StoGuard Fabric embedded in StoGuard coating. Use StoGuard RediCorners at corners of rough openings. Refer to Sto Details. Pre-treat defects such as knots in wood-based sheathing, vacant fastener holes, and minor static cracks (up to 1/16 inch [1.6 mm] wide) in concrete and CMU with Sto Gold Fill® or Sto RapidGuard®. If cracks are structural consult an engineer.

APPLICATION

Refer to StoGuard Air and Water-resistive Barrier Detail Booklets at www.stocorp.com for illustrations of installation.

Product	Use or Application
4-in StoGuard Fabric	sheathing joints and seams
6-in StoGuard Fabric	2x4 rough opening protection Inside and outside corners
9-in StoGuard Fabric	2x6 rough opening protection
StoGuard Redicorner	corners of rough openings

Apply between 40° and 100°F (4° and 38°C) during application and drying period. Apply only to fully cured, structurally sound, clean, dry, properly prepared, frost-free surfaces.

PRODUCT BULLETIN

StoGuard® Fabric StoGuard® RediCorner®

Product Number(s):

80207 StoGuard Fabric 6-in 81361 StoGuard Fabric 9-in
80208 StoGuard Fabric 4-in 80209 StoGuard RediCorner

APPLICATION (CONTINUED)

StoGuard Fabric for Joints and Seams: apply the StoGuard coating liberally (minimum 15 wet mils) by airless spray or with a ¾-in (19mm) nap roller at the sheathing joint. Immediately place the fabric in the wet StoGuard coating, and embed and smooth the fabric with a roller so no wrinkles exist. Apply an additional coat of the StoGuard coating to completely embed and seal the fabric.

Should gaps exceed 1/8 inch (3 mm), up to 1/4 inch (6 mm) wide at the sheathing joint, apply low expanding urethane foam into joints and rasp or shave flush with the sheathing surface before installing the joint treatment.

StoGuard RediCorner and StoGuard Fabric for Rough Opening Protection: apply the StoGuard coating liberally (15 wet mils) at the rough opening corner. Immediately place StoGuard RediCorner in the wet coating on the inside of the rough opening with the tabs oriented so they are on the face of the sheathing. Embed StoGuard RediCorner in the coating by brushing or rolling. Apply additional coating to completely embed and seal the fabric. Repeat until all corners have been treated. After all corners have been installed, apply a liberal coat of the StoGuard coating to the sill of the rough opening. Immediately embed StoGuard Fabric into the coating by placing it in the wet coating and embedding and smoothing the fabric with a roller so no wrinkles exist. Overlap StoGuard RediCorner by at least 2-in (51mm) with StoGuard Fabric. Repeat at jambs and head. Once the entire rough opening has been treated, inspect for voids and pinholes. If found, apply more coating until the voids/pinholes have been filled to achieve a VOID and PINHOLE FREE surface.

LIMITATIONS

- Use in conjunction with the StoGuard Air and Water-resistive barrier coatings.
- Protect from rain and freezing until COMPLETELY dry.
- Apply only when the surface and ambient temperatures are above 40°F (4°C) and below 100°F (38°C) during application and drying period.
- Not recommended for use when cool, damp conditions exist for prolonged periods. Cool, damp conditions retard drying and may require extended periods of protection.
- Do not use below grade or on surfaces subject to in-service water immersion.
- Fire-retardant treated or pressure treated plywood substrates must be dry and free of all bond-inhibiting materials.
- Not recommended for spanning sheathing joints or holes in excess of 1/8" (3 mm) wide.
- Ventilate temporary heaters to the exterior to prevent water vapor from accumulating on or within the wall assembly materials.
- When StoGuard Air and Water-resistive Barrier coatings are used in conjunction with StoTherm ci Systems, ensure the surface is clean, dry, and free of surface contamination. Do not expose the coating to weather for more than the allowable period printed under LIMITATIONS in the applicable Product Bulletin.

LIMITED WARRANTY

This product is subject to a written limited warranty which can be obtained free of charge from Sto Corp.

HEALTH AND SAFETY

Warning: KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY

Disposal: dispose in accordance with local, state, or federal regulations

Consult the Safety Data Sheet (SDS) for further health and safety information, available at www.stocorp.com

PRODUCT BULLETIN

StoGuard® Fabric StoGuard® RediCorner®

Product Number(s):

80207 StoGuard Fabric 6-in 81361 StoGuard Fabric 9-in

80208 StoGuard Fabric 4-in 80209 StoGuard RediCorner

TECHNICAL DATA

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULT*
Accelerated Weathering/ Hydrostatic Pressure ¹	ASTM E2570/ AATCC 127 (modified)	No cracking of the coating or bond failure, no water penetration after cyclic weathering & 5 hour water column (21.5 in [55 cm])	Pass
Structural, Racking, Restrained Environmental Conditioning, and Resistance to Water Penetration ¹	ASTM E2570/ E1233/ E72/E331 (par 6.6.3)	No cracking in the field of the panel, at substrate joints, and at the interface with flashing, no water penetration	Pass, no water penetration after sequence of 15 minute water sprays at 2.86, 6.24, 12.0, and 15.0 psf (137, 299, 574, and 718 Pa)
Fire Performance of Assembly ¹	NFPA 285	Comply with acceptance criteria	Complies (see below)
Building Code Compliance	<ul style="list-style-type: none"> • Meets requirements for use on noncombustible construction as a component of: <ul style="list-style-type: none"> • StoTherm® ci, StoPowerwall ci®, StoQuik® Silver, StoPanel®, and StoLite®. Refer to ICC-ESRs 1748, 4500, and 1233 • StoVentec® Ventilated Rainscreen wall systems. Refer to Intertek Design Listings Sto/CWP 30-01, Sto/CWP 30-02, and Intertek CCRR-0454 • Code compliant concrete, concrete masonry, portland cement stucco and other wall assemblies. Refer to ICC-ESR 1233 		
*Results are based on lab testing under controlled conditions. Results can vary between labs or from field tests.			
1. Test specimens made with StoGuard Fabric embedded in StoGuard air and water-resistive barrier coating at sheathing joints and seams			

Sto Corp. 3800 Camp Creek Parkway Building 1400, Suite 120 Atlanta, GA 30331 Tel: 404-346-3666 Toll Free: 1-800-221- 2397 Fax: 404 346-3119 www.stocorp.com	Revision Number: 009 Date: 8/2023	<p style="text-align: center;">ATTENTION</p> <p>This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com</p>
---	--------------------------------------	--