


StoTique®

80203 StoTique

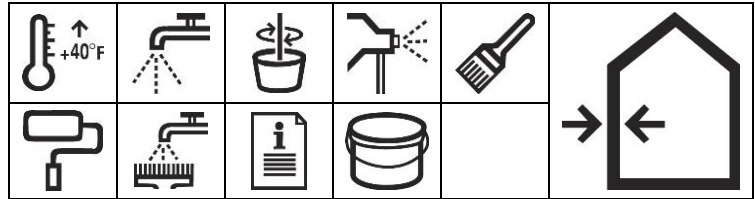

Technical Data

VOC (g/L) This product complies with US EPA (40 CFR 59) and South Coast AQMD (Rule 1113) VOC emission standards for architectural coatings. VOC less than 50 g/L.

Mixing

Use product immediately to avoid settling or skinning.

Frequent agitation is required throughout application to ensure color consistency.

1GP: Add 4 pounds of clean potable water to the pail. This should leave about 1.25 inches of headspace in the pail. Mix the sealed pail of product with the water added. Shake the pail for approximately 1 minute by hand. Foaming will occur which will leave a little less than an inch of headspace in the pail. This will give you the required mix ratio of 1 part of StoTique to 1.3 parts of water (by volume).

IMPORTANT: ADD WATER JUST PRIOR TO APPLICATION TO PREVENT SETTLING. ONCE WATER IS ADDED THE PRODUCT SHOULD BE APPLIED THE SAME DAY.

5 GP: Add clean potable water to the pail to fill approximately half the pail. Then mix with a clean rust-free paddle and drill. Add more water up to the second rib from the top of the pail.

StoTique is an exterior and interior coating that achieves an "antique" mottled effect or other custom decorative effects. Use it over existing EIFS, stucco, previously painted wall surfaces, or any Sto textured or smooth finish coating.

Coverage

800-1000 ft² per gallon.

Coverage will vary depending on substrate conditions, application technique, waste factor, and final film thickness. Construct a mock-up under actual conditions of use to verify proper surface preparation, coverage, and method of application, for approval by the appropriate authority.

Packaging

1 gallon pail (3.8 L)
5 gallon pail (19 L).

Shelf Life

12 months, if properly stored and sealed.

Storage

Protect from extreme heat [90°F (32°C)], freezing, and direct sunlight.

StoTique

Application

Apply only to sound and clean, dry, properly prepared frost-free surfaces. Do not apply over damp surfaces or during rain, hail, or snow events, or if rain, hail, or snow is imminent.

Apply with a roller, brush, sponge, Hudson-type sprayer, airless spray equipment, and/or any combination of these tools depending on the desired end appearance.

Once material is applied it may be dabbed with a sponge or rag to create a custom look. It is best to apply StoTique in two light coats. Avoid running, brush or roller marks. If they occur correct immediately while material is still wet to achieve the desired effect.

IMPORTANT:

StoTique should be darker than the finish surface that it goes over for best results. Prepare a job site mock-up of the final coating assembly to verify aesthetics and adhesion to properly prepared surface. Final appearance is highly dependent on application technique and desired effect. Proceed only when satisfied with final color/effect on the basis of approved mock-ups.

Limitations

- Apply when ambient temperatures are 40°F (4°C) and rising, and below 100° F (38° C) during application and drying period.
- Do not apply if the surface temperature is less than 5°F (2.8°C) above the ambient dew point temperature.
- Do not use below grade or in areas subjected to hydrostatic pressure, water immersion, ponding, or puddling
- Dark colored coatings are not recommended for use over Exterior Insulation and Finish Systems (EIFS). Select finish colors with a lightness value of 20 or greater when used as part of an EIF System.
- Do no overcoat with solvent-based materials
- Efflorescence of portland cement-based substrates is such as concrete, stucco, and concrete masonry sometimes causes staining or discoloration on the surface of applied coatings. Efflorescence is neither caused nor prevented by the Sto coating.
- Not for use on wood or metal surfaces

Drying

Dries within 24 hours under normal [70°F (2°C), 50% RH] conditions. Drying time varies with temperature/humidity and surface conditions. Protect installed product from rain, freezing, and continuous high humidity until completely dry.

Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Maintenance

Repair cracks or other damage to façade and recoat at intervals as needed to maintain fresh appearance. Repair balconies, scuppers, flashing and similar water shedding elements that lack drip edges or that fail to shed water from the façade surface. Prevent or repair leaks from roofs, parapets, windows, sealants, or other components of construction, and prevent accumulation of water inside the wall assembly during and after construction. Water accumulation behind the coating can cause damage to the coating and/or underlying construction.

Health And Safety

Health Precautions

Product is water-based. As with any chemical construction product, exercise care when handling.

Safety Precautions

Use adequate ventilation. Safety goggles and protective gloves are recommended. Remove contaminated clothing immediately.

First Aid

SKIN CONTACT: Wash thoroughly with soap and water.

EYE CONTACT: Flush immediately with water for 10-15 minutes and contact a physician.

RESPIRATORY PROBLEMS: Remove affected person to fresh air immediately and contact a physician.

HYGIENE: Wash hands immediately after use. Wash clothing before re-use.

Spills

Collect with suitable absorbent material such as cotton rags.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) on www.stocorp.com for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty which can be obtained free of charge from Sto Corp.

Refer to Sto Specifications for more complete information on proper use and handling of this product.

Sto Corp.
3800 Camp Creek Parkway
Building 1400, Suite 120
Atlanta, GA 30331

Tel: 404-346-3666
Toll Free: 1-800-221-2397
Fax: 404 346-3119

www.stocorp.com

S155-80203
Revision Number: A3.0
Date: 03/2019

Attention

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.