


## PRODUCT BULLETIN

# StoCast Brick Compound

Product Number: 81760

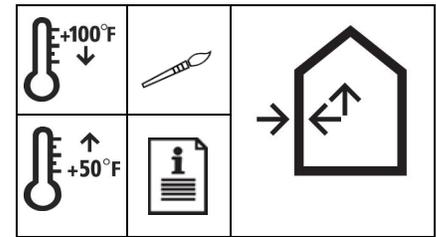

### PRODUCT DESCRIPTION

StoCast Brick Compound is a liquid form of StoCast Brick, tinted to the desired color, and is used to fill irregular areas, corners, and to repair surface damage or touch-up bricks for an authentic, seamless appearance.

FEATURES	BENEFITS
Color matched to StoCast Brick	Repairs become seamless and non-visible
Easy to apply	Applies with artist's brush, masonry pointing tool, or margin trowel
Made with acrylic polymers	Durable, Freeze/Thaw and UV resistant, superior flexural strength; resists cracking
Identical to StoCast Brick	Physical, mechanical, and other properties match StoCast Brick

**Packaging:** 1 Gallon (3.8L) pails

**Sheen:** Flat

**Shelf Life:** 1 year in original, unopened, properly stored packaging.

**Storage:** Store in tightly sealed container. Protect from extreme heat [90°F (32°C)], freezing, and direct sunlight.

### SURFACE PREPARATION

StoCast Brick surface must be clean, dry, and free of frost and surface contamination such as dust, dirt, salts, grease, oils, efflorescence, mold, algae, mildew, and any other contamination that may affect adhesion.

### APPLICATION:

Apply StoCast Brick Compound with an artist's brush for light repairs to fill small gaps or holes in the brick surface. For larger repairs apply with a masonry pointing tool or margin trowel. Tool or sculpt the material to match the surface texture of the brick. Where cut pieces of StoCast Brick adjoin other bricks, for example, at inside corners, "dress" the seam between the bricks with StoCast Brick Compound.

**Clean Up:** Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

**Drying:** StoCast Brick Compound dries within 24 hours under normal drying conditions [70°F (21°C), 50%RH]. Drying time varies depending on temperature/humidity and surface conditions. Hot, dry conditions accelerate drying. Cool, damp conditions delay drying and may require extended periods of protection from rain and freezing. Protect from rain, freezing and continuous high humidity until completely dry.

For more detailed information on application refer to *StoCast Brick over StoTherm® ci Installation Guide*, No. 58s.SCB

### LIMITATIONS

- Use only when surface and ambient temperatures are above 50 to 100°F (10-38°C) during application and drying period.
- Not for use as an adhesive or sealer for StoCast Brick. Use only for touch up and surface repairs.

### WARRANTY

This product is subject to a written limited warranty which can be obtained free of charge from Sto Corp.

### HEALTH & SAFETY

Refer to the Safety Data Sheet available at [www.stocorp.com](http://www.stocorp.com)

<p><b>Sto Corp.</b>          3800 Camp Creek Parkway          Building 1400, Suite 120          Atlanta, GA 30331          Tel: 404-346-3666          Toll Free: 1-800-221-2397          Fax: 404 346-3119  <a href="http://www.stocorp.com">www.stocorp.com</a></p>	<p>Revision Number: 000          Date: March 2026</p>	<p style="text-align: center;"><b>ATTENTION</b></p> <p>This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. <b>STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.</b> For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, <a href="http://www.stocorp.com">www.stocorp.com</a></p>
--	---	--