


StoSilco® Lit

80136 StoSilco Lit 1.0
 80137 StoSilco Lit 1.5
 80138 StoSilco Lit R1.5

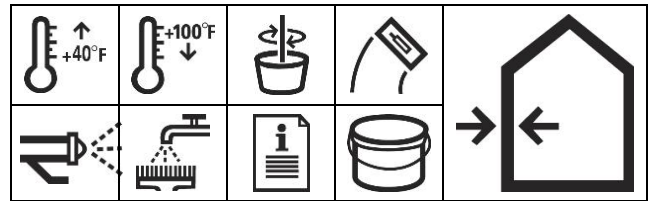

Technical Data

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS
Surface Burning	ASTM E-84	< 25 Flame Spread < 450 Smoke Developed	0 15
Flexibility	ASTM D-522	4" mandrel bend	Pass
Water Vapor Transmission (U.S. perms)	ASTM E-96 Modified	28 days	42
Accelerated Weathering	ASTM G-53	2000 hours	No deleterious effects @ 5000 hrs
Chalk Rating	ASTM D-4214	2000 hours 5000 hours	9 (10 = best on scale) 8
Yellowness Index	ASTM E-313	5000 hours	0.77 (0 = no change; 2 = barely discernable change)
Freeze-thaw Resistance	EIMA 101.01	60 cycles	No deleterious effects @ 90 cycles
Mildew Resistance	ASTM D-3273	No growth @ 28 days	No growth @ 60 days
Salt Spray Resistance	ASTM B-117	300 hours	No deleterious effects @ 700 hrs
Wind Driven Rain	Fed TT-C-555B	24 hour driving rain	No water penetration
Water Resistance	ASTM D-2247	14 days	No deleterious effects @ 42 days
Abrasion Resistance	ASTM D-968	528 qts. sand	No cracking, checking or loss of film integrity @ 1057 qts.
Adhesion (psi)	ASTM D-4541	28 days	> 120 to concrete
VOC (g/L)	This product complies with US EPA (40 CFR 59) and South Coast AQMD (Rule 1113) VOC emission standards for architectural coatings. VOC less than 50 g/L.		

StoSilco Lit is a silicone enhanced textured wall coating designed for use as a finish coat over prepared vertical concrete, masonry or plaster substrates and in StoTherm® ci Systems. StoSilco Lit is a decorative and protective wall coating used for both restoration and new construction. StoSilco Lit is available in two textures and various aggregate sizes.

StoSilco Lit is enhanced by the addition of Optilink®, a remarkable polymer technology development by Sto that improves the curing and film formation process.

Coverage

StoSilco Lit 1.0: 145-165 ft²
 (13.5-15.3 m²)
 StoSilco Lit 1.5: 120-145 ft²
 (11.1-13.5 m²)
 StoSilco Lit R 1.5: 135-155 ft²
 (12.5-14.4 m²)

Coverages may vary depending on application technique and surface conditions.

Packaging

5 gal. pail (19 L).

Shelf Life

18 months, if properly stored and sealed.

Storage

Protect from extreme heat [90°F (32°C)], freezing, and direct sunlight.

Features	Benefits
1 Hydrophobic	Repels water; resists wind driven rain
2 Silicone Enhanced	Superior resistance to dirt and airborne pollutants, mildew and algae growth; lowest maintenance
3 Superior Vapor Permeability	Allows substrate to breathe naturally, resists blisters caused by trapped water vapor
4 Ready-Mixed	Ready to use; no additive needed
5 Water-Based	Safe, non-toxic; cleans up with water
6 Sto Optilink® Advanced Polymer Technology	Higher resistance to dirt pick-up, mildew, and algae growth; easier to apply and texture
7 Low VOC	Meets South Coast Air Quality Management District Requirements

Surface Preparation

Concrete and masonry surfaces: Surfaces must be free of all bond-inhibiting materials, including dirt, efflorescence, form oil and other foreign matter. Loose or damaged material must be removed by water blasting, sandblasting or mechanical wire brushing and repaired. Avoid application over irregular surfaces. Resurface, patch or level surfaces to required tolerance and smooth-ness with appropriate Sto leveling materials.

StoSilco® Lit

Surface Preparation cont.

Refer to ASTM D-4258 and ASTM D-4261 for complete details on methods of preparing cementitious substrates for coatings.

StoTherm® ci Systems: Surface must be free of all bond-inhibiting materials. Sto recommends priming cementitious substrates using the appropriate Sto primer

prior to application of finish.

Gypsum wallboard surfaces: Wallboard must be taped and fasteners spotted with joint compound. Refer to ASTM C-840 and gypsum wallboard manufacturer's literature. Surface must be free of dust, dirt and other bond-inhibiting materials. Surface must be primed with appropriate Sto Primer.

Mixing

Mix with a clean, rust-free electric drill and paddle. A small amount of clean water may

be added to aid workability. Limit addition of water to amount needed to achieve the finish texture.

Application

Apply only to sound and clean, dry, properly prepared, frost-free surfaces. Apply with a clean stainless steel trowel to a rough thickness slightly more than the largest aggregate size. Use the trowel to scrape the material down to a uniform thickness no greater than the largest aggregate size. Achieve final texture by floating with the appropriate trowel in a figure eight motion; stainless steel trowel for StoSilco Lit (pebbled texture finishes) and plastic float for StoSilco Lit R (rilled texture finishes). Once applied, the working time is up to 20 minutes depending upon material, ambient temperatures and surface conditions.

Spray: Apply with a hand-held gravity-feed hopper-type sprayer, texture spray pump machine, or other appropriate equipment such as StoSilo System or Sto's M-8 Spray Pump. Apply an even coat to ensure full coverage of the surface.

(Spray application is not recommended for StoSilco Lit R [rilled texture] finish.)

IMPORTANT: ALWAYS check color for proper match.

If color does not match, STOP—call your Sto representative. For best results always prime cementitious substrates. Apply coating in a continuous application, always working from a wet edge or architectural break to eliminate cold joints. Minor shade variations may occur from batch to batch (refer to batch no. on pail). Avoid installing separate batches side-by-side and avoid application in direct sunlight. Avoid installing new finish adjacent to weathered or aged finish. Sto Corp. will not be responsible for shade or color variation from batch to batch, variation caused by application or substrate deficiencies, or fading resulting from natural causes such as weather. See Tech Hotline Nos. 0694-C, 0893-EC and 1202-CF for helpful tips on prevention of color problems. Protect installed product from rain, freezing, and continuous high humidity until completely dry.

Curing/Drying

Dries within 24 hours under normal conditions [70°F (21°C), 50% RH]. Drying time varies with temperature/humidity and surface conditions.

Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Limitations

- Use only when surface and ambient temperatures are above 40°F (4°C) and below 100°F (38°C) during application and drying period.
- Sloped surfaces: refer to Sto details
- StoSilco Lit should not be used on weather-exposed horizontal, below grade or water immersed surfaces
- For Exterior Insulation and Finish Systems, select finish colors with a lightness value of 20 or greater.

Health And Safety

WARNING!

Causes eye and skin irritation.

Precautionary Statement

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

FIRST AID MEASURES

Eye Contact: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eyelids with fingers. Get immediate medical attention.

Skin Contact: Immediately wash skin with plenty of soap and water for 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention.

Ingestion: If swallowed, do NOT induce vomiting. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person.

Store locked up. Dispose of contents/container in accordance with Local, State, Federal and Provincial regulation.

Spills

Collect with suitable absorbent material such as cotton rags.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) on www.stocorp.com for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty which can be obtained free of charge from Sto Corp.

Refer to *Sto Specifications for more complete information on proper use and handling of this product.*

Sto Corp.
3800 Camp Creek Parkway
Building 1400, Suite 120
Atlanta, GA 30331

Tel: 404-346-3666
Toll Free: 1-800-221-2397
Fax: 404 346-3119

www.stocorp.com

**S155-80136, 80137,
80138**
Revision Number: A3.0
Date: 06/2016

Attention

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.