


StoTherm® ci Over Masonry Window Sill: Rough Opening Protection and Pan Flashing at Sill

Detail No.: 19.26a1
Date: February 2019

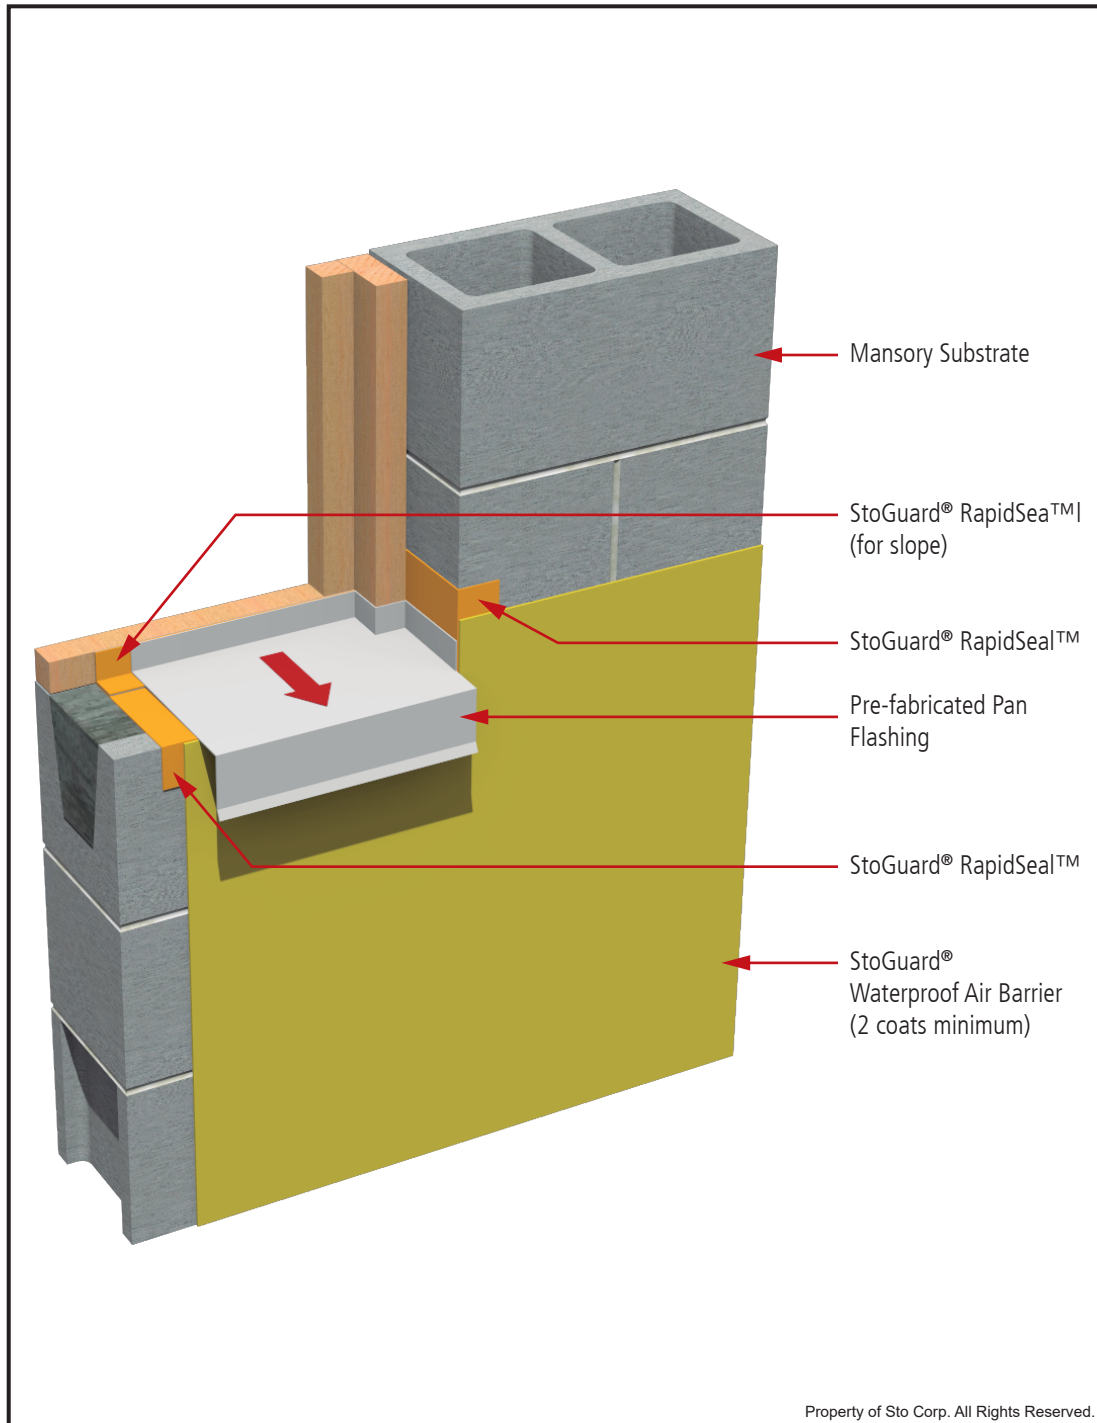

Notes:

- 1) Protect masonry sill with StoGuard® RapidSeal™. Fold up minimum 4 inches (102mm) at jamb. Fold down 2 inches (51mm) at sill and at ends onto face of masonry.
- 2) Install StoGuard® Rapid-Seal™ strip at back of opening to create slope and fold up nailer.
- 3) Secure pre-fabricated pan flashing by others into place.
- 4) Provide pan flashing with thermal break in cold climate zones.
- 5) Refer to Detail 19.26a2 for protection at jamb and Sto details 19.24a1 and 19.24a2 for protection at head. Refer to Sto detail 19.26a3 for complete sill / jamb assembly.

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

www.stocorp.com

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

