


StoTherm® ci XPS
System Components: Ultra-High Impact Resistance

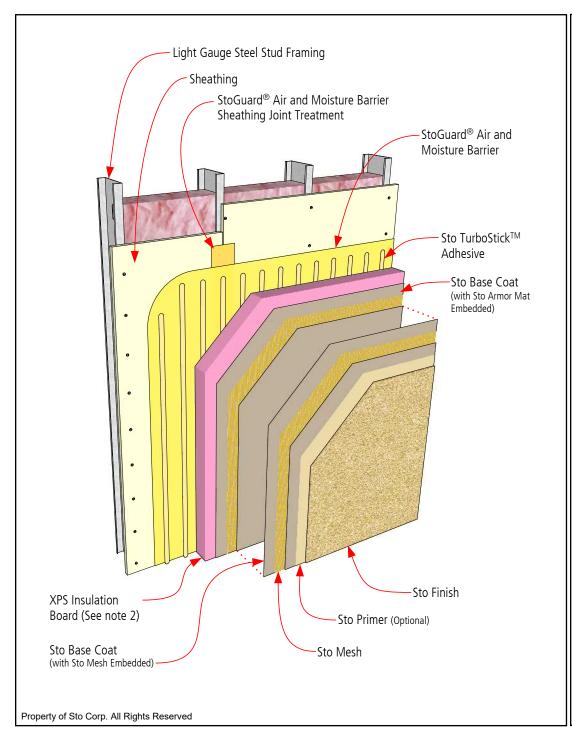

Notes:

1.StoTherm ci System Components:

Detail No.: 53s.01

Date: January 2017

- StoGuard Air and Moisture Barrier
- Sto Adhesive
- XPS Insulation Board
- Sto Base Coat
- Sto Armor Mat XX
- Sto Base Coat
- Sto Mesh
- Sto Primer (optional)
- Sto Finish
- 2. XPS insulation options:
- -Owens Corning Foamular® CI-C Extruded Polystyrene
- -Dow STYROFOAMTM Panel Core 20 Extruded Polystyrene
- 3. Ultra-high impact resistance recommended at all ground floors to a minimum height of 6'-0" (1.8 m) above finished grade and other areas accessible to pedestrian traffic, abnormal stress or impact.

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install Sto products. Refer to project specific contract documents.

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, of for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

www.stocorp.com