


# StoVentro™ Sub-Construction System

## StoVentro Component Dimensions w/ Steel Brackets

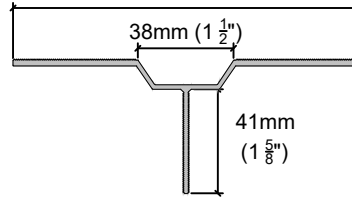
Date: January 2024

Detail No.: 90.Sc.004


FP and GP brackets are available in Zn-Al-Mg-galvanized steel with or without spring fingers. Aluminum brackets are also available (see Detail No.: 90Sc.004A). Stainless steel versions available made-to-order only with lead times. For full system offering see StoVentro Product Bulletin, System Bulletin, and Installation Videos. T-Profiles, L-Profiles, and hat channels are extruded aluminum.

 90mm (3 <sup>9</sup>/<sub>16</sub>" ) or 120mm (4 <sup>3</sup>/<sub>4</sub>" )

 52mm  
(2 <sup>1</sup>/<sub>8</sub>" )

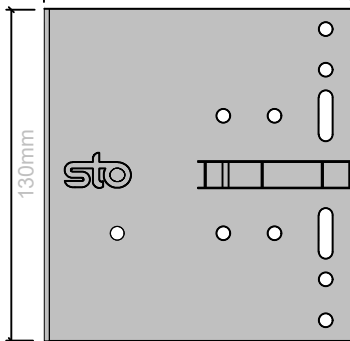
StoVentro T-Profile

 136mm (5 <sup>3</sup>/<sub>8</sub>" )

 41mm  
(1 <sup>5</sup>/<sub>8</sub>" )


StoVentro Gullwing T-Profile

 40mm (1 <sup>5</sup>/<sub>16</sub>" )

 50mm  
(1 <sup>15</sup>/<sub>16</sub>" )


StoVentro L-Profile

 Bracket Length  
80mm - 360mm



StoVentro Steel - Large Bracket (FP) w/ springfinger

 Bracket Length  
60mm - 360mm




StoVentro Steel - Large Bracket (FP)





StoVentro 1/2 Hat Channel



StoVentro 1 inch Hat Channel


 Bracket Length  
80mm - 360mm


StoVentro Steel - Small Bracket (GP) w/ springfinger


 Bracket Length  
60mm - 360mm


StoVentro Steel - Small Bracket (GP)


 StoVentro Steel Stud Fastener  
1/4 -14 x 2" self-drilling hex head screw with washer - (stainless steel)

 StoVentro Sub-construction Fastener  
5.5mm x 22mm ( <sup>3</sup>/<sub>16</sub> in. x <sup>7</sup>/<sub>8</sub> in. ) self-drilling hex head screw - (stainless steel)

### ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

**STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, [www.stocorp.com](http://www.stocorp.com).