


StoQuik® Silver DrainScreen™ Pan Flashing at Opening Sill

Detail No.: 11.21a DS

Date: January 2015

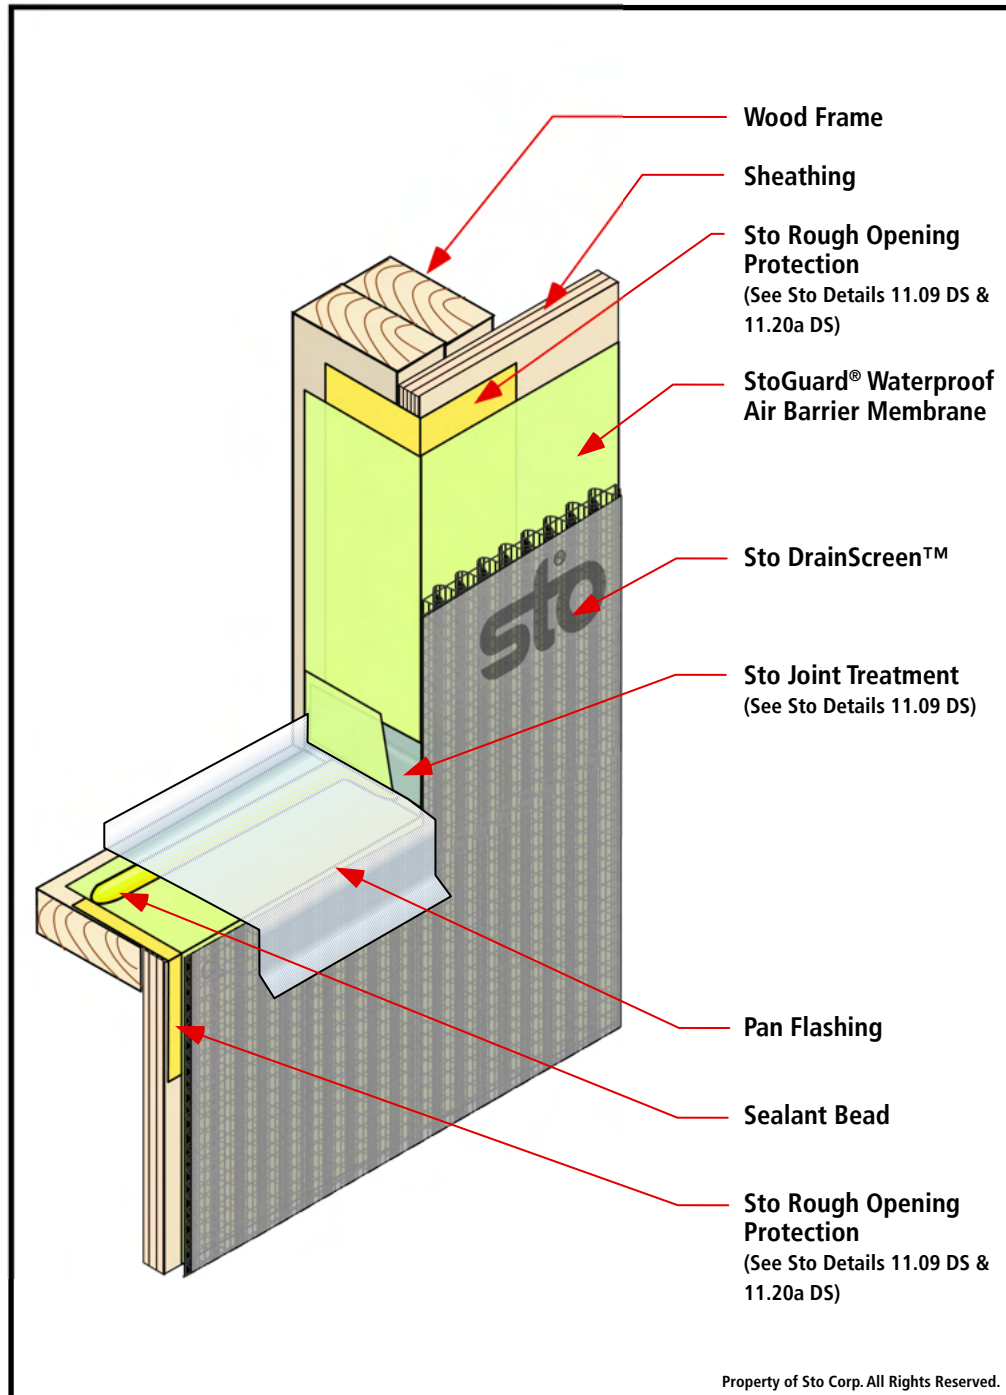

Notes:

1. Wrap opening as shown in Sto Detail 11.20a DS
2. Install one or more beads of neutral-cure, silicone sealant on the sill and jamb.
3. Install the sill pan flashing into the wet sealant and press it into place. Tool any excess sealant off at the top of the side dams and back edge of the pan flashing.
4. When installed the seal between the pan flashing and the rough opening protection must be air-tight.
5. Lap Sto Joint Treatment onto the end dams so water draining down the jamb will be directed into the pan flashing and out of the wall assembly.
6. Refer to Sto Specification QS 200 DS for complete information on design requirements, installation and accessories.

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

www.stocorp.com