


StoPowerwall® StoCreativ® Brick Finish

Detail No.: 4.05

Date: December 2015

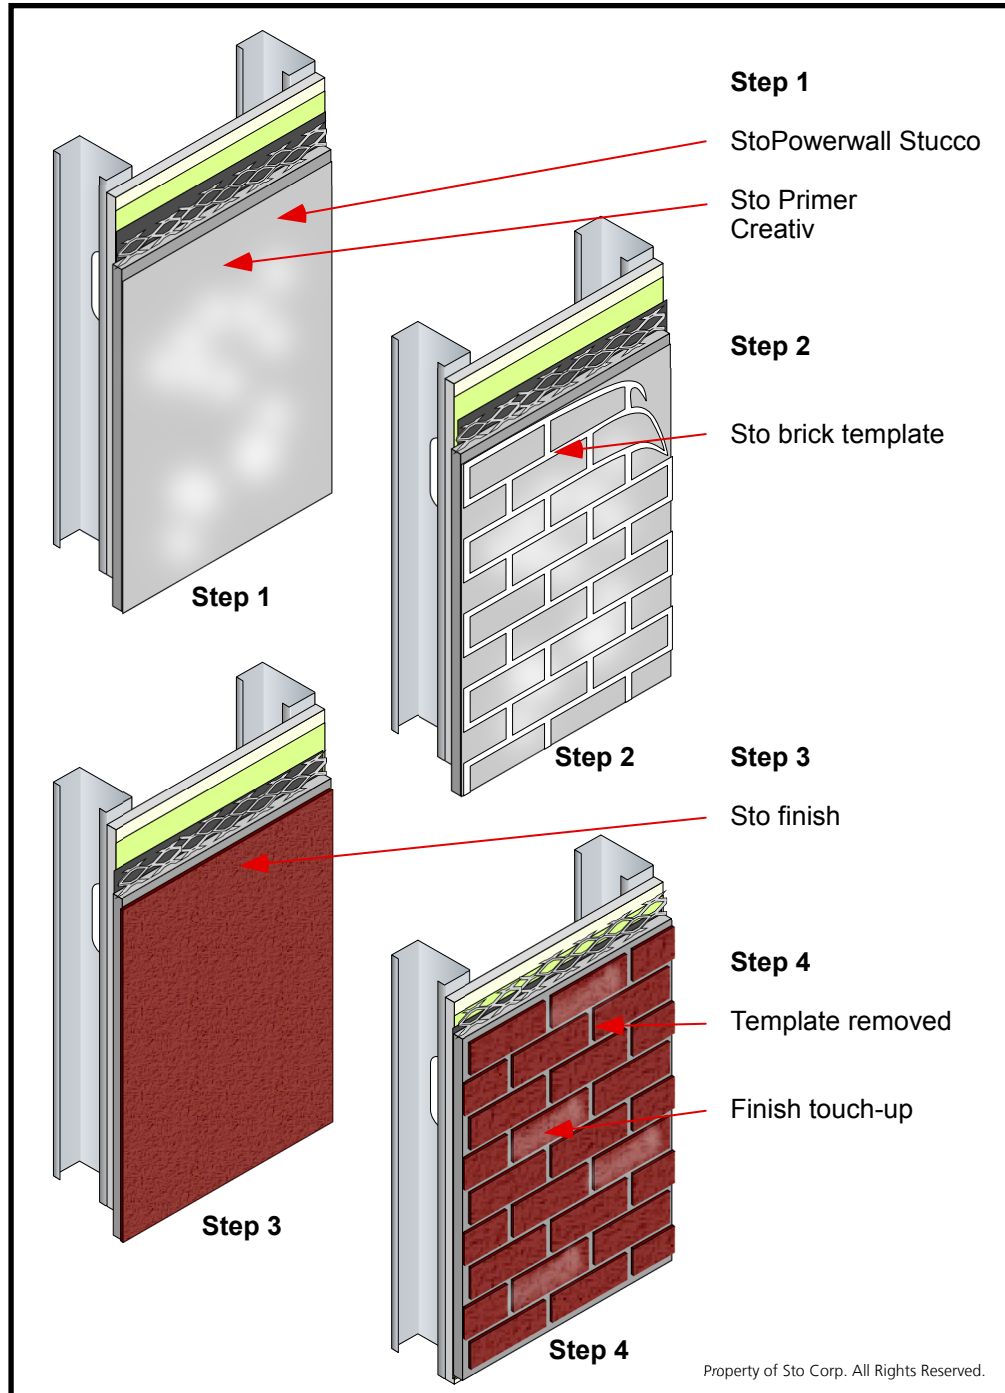

Notes:

Step 1

- 1] Install StoPowerwall stucco [Refer to Sto Detail 4.01].
- 2] Install Sto Primer Creativ over the Sto Powerwall base coat.

- 3] Optional: Apply a second application of Sto Primer Creativ to provide a slightly uneven color to simulate variable mortar color.

Step 2

- 4] Apply the Sto brick template to the dry primer.

Step 3

- 5] Install appropriate Sto finish to match the Creativ Brick texture specified. Refer to Sto Creativ Brick Specification A100 FF

Step 4

- 6] Remove the template before the finish dries.
- 7] Optional: After the finish dries, touch up the finish with StoCoat® Acryl or StoTique® in colors and pattern to match approved sample.

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

Attention

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

www.stocorp.com